


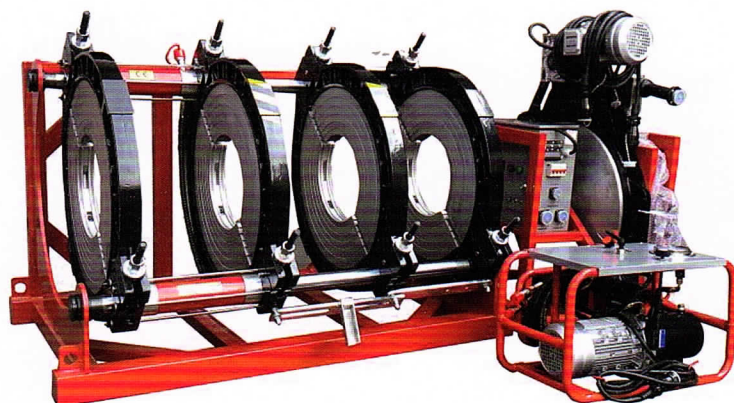

Model	PF400	PF450	PF500	PF630
Welding Range(mm)	200 225 250 280 315 355 400	(250) 280 315 355 400 450	(250) 280 315 355 400 450 500	(315 355) 400 450 500 560 630
Heating Plate Max. Temperature	270℃	270℃	270℃	270℃
Temperature Deviation in Surface	≤±7℃	≤±7℃	≤±7℃	≤±7℃
Working Voltage, Frequency	380V/220V, 50/60Hz	380V/220V, 50/60Hz	380V/220V, 50/60Hz	380V/220V, 50/60Hz
Total Power	7.2KW	7.2KW	7.7KW	10.6KW
Heating Plate Power	5.0KW	5.0KW	5.5KW	8.0KW
Planning Tool Power	1.1KW	1.1KW	1.1KW	1.5KW
Hydraulic Unit Power	1.1KW	1.1KW	1.1KW	1.1KW
Pressure Adjustable Range	0-8Mpa	0-8Mpa	0-8Mpa	0-8Mpa
Weight	350KG	360KG	460KG	610KG
Package	3 Wooden Boxes	3 Wooden Boxes	3 Wooden Boxes	3 Wooden Boxes
Volume	1.8CBM	1.8CBM	1.93CBM	2.8CBM