


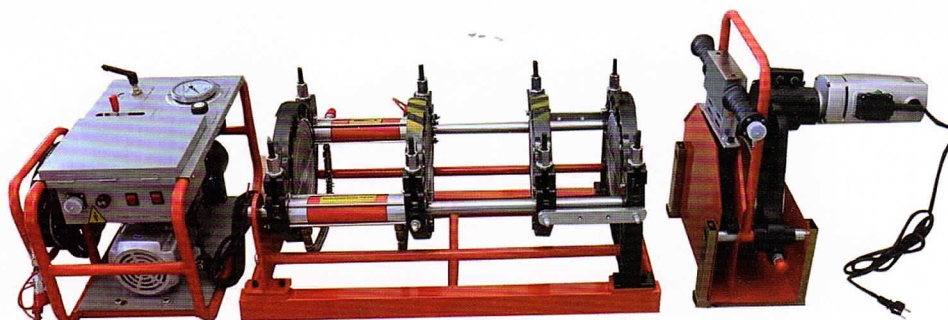

| Model                                   | PF160                             | PF200                                        | PF250                                             | PF315                                            | PF355                                                |
|-----------------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------------------|--------------------------------------------------|------------------------------------------------------|
| <b>Welding Range(mm)</b>                | 40 50 63 75 90<br>110 125 140 160 | 40 50 63 75 90<br>110 125 140 160<br>180 200 | 50 63 75 90 110<br>125 140 160 180<br>200 225 250 | 90 110 125 140<br>160 180 200 225<br>250 280 315 | 90 110 125 140<br>160 180 200 225<br>250 280 315 355 |
| <b>Heating Plate Max. Temperature</b>   | 270℃                              | 270℃                                         | 270℃                                              | 270℃                                             | 270℃                                                 |
| <b>Temperature Deviation in Surface</b> | ≤±5℃                              | ≤±5℃                                         | ≤±5℃                                              | ≤±5℃                                             | ≤±5℃                                                 |
| <b>Working Voltage, Frequency</b>       | 220V,50/60Hz                      | 220V,50/60Hz                                 | 220V,50/60Hz                                      | 220V,50/60Hz                                     | 220V,50/60Hz                                         |
| <b>Total Power</b>                      | 2.45KW                            | 2.75KW                                       | 4.75KW                                            | 5.35KW                                           | 5.45KW                                               |
| <b>Heating Plate Power</b>              | 0.9KW                             | 1.2KW                                        | 2.2KW                                             | 2.8KW                                            | 2.9KW                                                |
| <b>Planning Tool Power</b>              | 0.8KW                             | 0.8KW                                        | 1.8KW                                             | 1.8KW                                            | 1.8KW                                                |
| <b>Hydraulic Unit Power</b>             | 0.75KW                            | 0.75KW                                       | 0.75KW                                            | 0.75KW                                           | 0.75KW                                               |
| <b>Pressure Adjustable Range</b>        | 0-6.3Mpa                          | 0-6.3Mpa                                     | 0-6.3Mpa                                          | 0-6.3Mpa                                         | 0-6.3Mpa                                             |
| <b>Weight</b>                           | 100KG                             | 105KG                                        | 147KG                                             | 180KG                                            | 210KG                                                |
| <b>Package</b>                          | 2 Wooden Boxes                    | 2 Wooden Boxes                               | 2 Wooden Boxes                                    | 2 Wooden Boxes                                   | 2 Wooden Boxes                                       |
| <b>Volume</b>                           | 0.4CBM                            | 0.4CBM                                       | 0.5CBM                                            | 1.0CBM                                           | 1.0CBM                                               |