


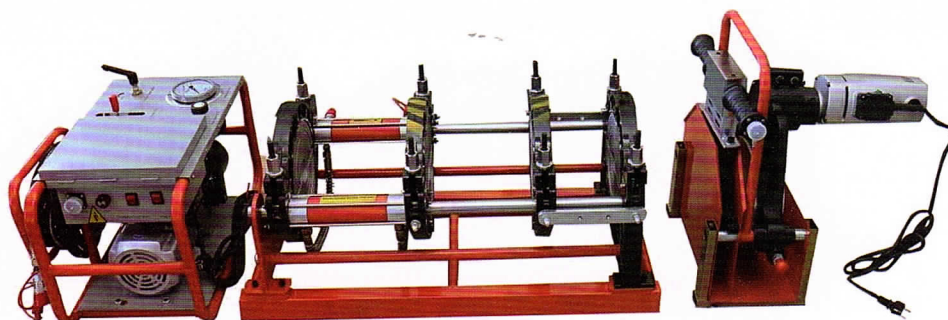

Model	PF160	PF200	PF250	PF315	PF355
Welding Range(mm)	40 50 63 75 90 110 125 140 160	40 50 63 75 90 110 125 140 160 180 200	50 63 75 90 110 125 140 160 180 200 225 250	90 110 125 140 160 180 200 225 250 280 315	90 110 125 140 160 180 200 225 250 280 315 355
Heating Plate Max. Temperature	270℃	270℃	270℃	270℃	270℃
Temperature Deviation in Surface	≤±5℃	≤±5℃	≤±5℃	≤±5℃	≤±5℃
Working Voltage, Frequency	220V,50/60Hz	220V,50/60Hz	220V,50/60Hz	220V,50/60Hz	220V,50/60Hz
Total Power	2.45KW	2.75KW	4.75KW	5.35KW	5.45KW
Heating Plate Power	0.9KW	1.2KW	2.2KW	2.8KW	2.9KW
Planning Tool Power	0.8KW	0.8KW	1.8KW	1.8KW	1.8KW
Hydraulic Unit Power	0.75KW	0.75KW	0.75KW	0.75KW	0.75KW
Pressure Adjustable Range	0-6.3Mpa	0-6.3Mpa	0-6.3Mpa	0-6.3Mpa	0-6.3Mpa
Weight	100KG	105KG	147KG	180KG	210KG
Package	2 Wooden Boxes	2 Wooden Boxes	2 Wooden Boxes	2 Wooden Boxes	2 Wooden Boxes
Volume	0.4CBM	0.4CBM	0.5CBM	1.0CBM	1.0CBM