


BRIEF & FEATURES

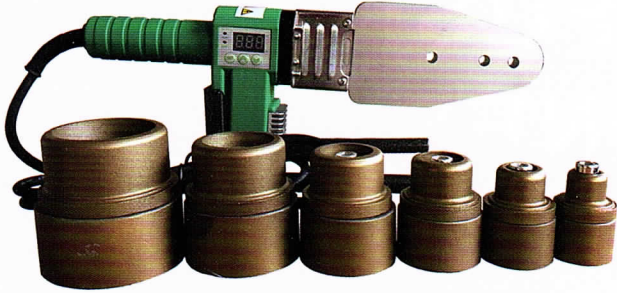

- It is widely used in socket welding PE, PP, PPR pipes or fittings which being used in construction site for water and gas supply.
- Sockets coated PTFE.
- Individual temperature control of heating plate, which has temperature display and adjustment function.
- Simple structure, mini dimension and easy operation.
- The structure design complies with DVS2208.

TECHNICAL SPECIFICATION

Model	20-32DD	20-63DD	75-110DD
Welding Range(mm)	20 25 32	20 25 32 40 50 63	75 90 110
Rated Voltage	220V	220V	220V
Power	700W	800W	1200W
Working Temperature	200-270℃	200-270℃	200-270℃
Environment Temperature	-15℃~45℃	-15℃~45℃	-15℃~45℃
Weight	4.0KG	5.0KG	5.0KG
Dimension	395*200*90mm	395*200*90mm	460*265*90mm